

Sysmac: A fully integrated platform

One connection - One software - One controller



- Scalable, flexible and complete automation solutions for manufacturing
- Software platform designed to maximize productivity
- Simplify integration of production lines and IT systems

Omron Provides Tailored Solutions

Flexible and integrated production business models

In today's globalized manufacturing environment, diverse and complex challenges arise and need to be overcome. The global market rapidly changes, and manufacturing companies are under increasing pressure to supply products in a timely manner that satisfy a wide variety of consumer needs. Omron industrial automation makes efficient, flexible and cost effective manufacturing possible.



Innovation

- New technology for smart manufacturing
- Collaboration between humans and machines
- Environmentally safe products



Productivity

- Integrated systems for optimized manufacturing
- Production data available in real-time
- In-line quality inspection: zero defects



Flexibility

- Quick product changeovers
- Open and third party connectivity
- Scalable systems for optimal solutions



Reliability

- Non-stop processes, 24/7 operation
- Extended product lifecycle



Globalization

- Products meet global standards
- Local support for training, repairs and spare-parts supply
- Engineering environment compliance with global standards

- ✓ Through automation, **Omron** supports the advancement of manufacturing and contributes to a sustainable society by providing environmentally safe products



Machine /
Equipment builder


- ✓ The **Sysmac** technology platform ensures a flexible and integrated production business model

Panel builder /
System integrator

Manufacturer

SYSMAC
always in control

Parts manufacturer

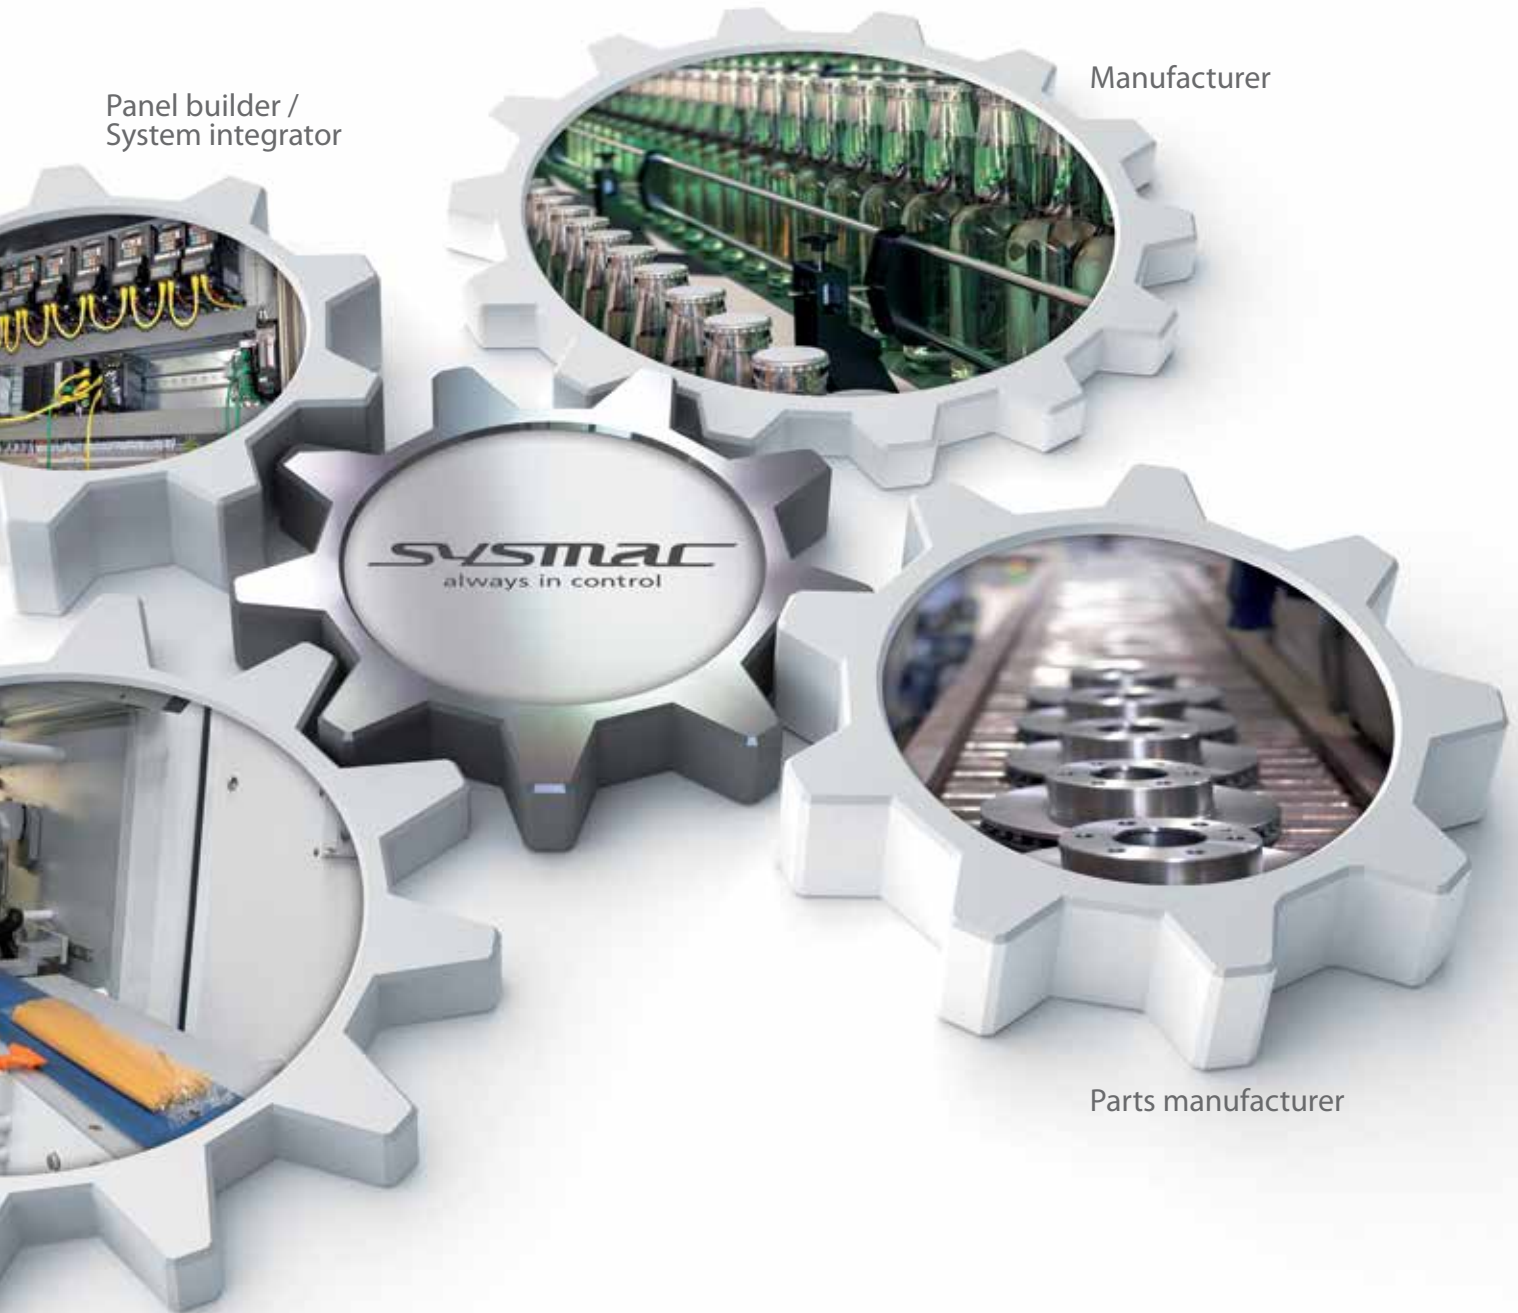

Sysmac: A Fully Integrated Platform

Integration and Functionality

Sysmac is an integrated automation platform dedicated to providing complete control and management of your automation plant. At the core of this platform, the Machine Controller series offers synchronous control of all machine devices and advanced functionality such as motion, robotics and database connectivity. This multidisciplinary concept allows you to simplify solution architecture, reduce programming and optimize productivity.

- ✓ **One Machine Controller**
Complete integration of motion and logic sequence



FACTORY
AUTOMATION

MACHINE
CONTROL

Machine Automation Controller /
Industrial PC with Sysmac Machine Control

Motion




- Motion Control is integrated within the IDE, and operating in real-time
- Standard PLCopen Function Blocks plus Omron generated motion FB's
- Direct synchronous control for position, speed and torque

Safety



- All safety related data is synchronized with the whole network
- The PLCopen® FBD simplifies and accelerates the development process through structuring safety circuits and enhancing reuse.

- ✓ **One Integrated Development Environment software**
for configuration, programming, simulation and monitoring

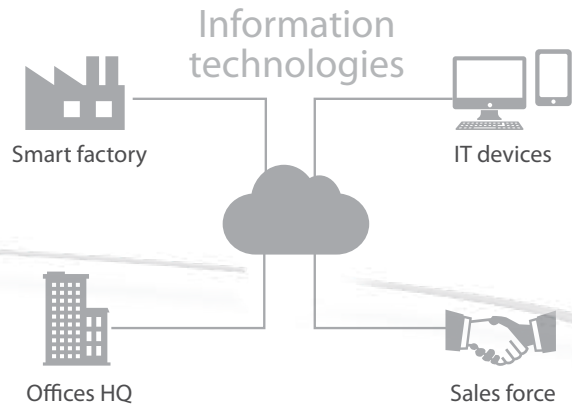

Information



- Sysmac communicates in real-time with Databases such as SQL
- Secure Data: In the event of a server going down or losing communications, data is automatically stored in internal memory
- Sysmac operates with Databases at high speed [1000 table element/ 100 ms] ensuring realistic Big Data Processing to improve productivity and aid predictive maintenance etc.

✓ **Integrated Automation Control:**

The Sysmac platform is scalable and provides the performance and functionality for a wide range of solutions from simple machines to manufacturing cells

Vision



- Higher resolution images available without increasing the vision processing time
- Shape search technology provides more stable and accurate object detection for Pick & Place projects

Robot



- Function Blocks in the Adept Robot Control Library enable robot control from the NJ/NX/NY Controller using Ladder and Structured Text

Sensing



- Full control of the process parameter setting and predictive maintenance functions
- High precision detection and positioning data synchronized on the network

One Connection


Seamless machine control and factory automation

One machine control through one connection and one software is how we define the Sysmac automation platform. The Machine Automation Controller integrates logic, motion, safety, robotics, vision, information, visualization and networking under one software: Sysmac Studio. This one software provides a true Integrated Development Environment (IDE) that also includes a custom 3D motion simulation tool. The machine controller comes standard with built-in EtherCAT and EtherNet/IP. The two networks provide the perfect match between fast real time machine control and data plant management.




EtherCAT - Machine Control

- Fast and precise: Fastest cycle time of 125 μ s, synchronization with 1 μ s jitter
- 512 slaves
- Embedded in Omron servo drives, inverters, I/O, Safety, Vision and Sensing
- Uses standard STP Ethernet cable with RJ45 connectors
- One connection using Safety over EtherCAT (FSoE) protocol

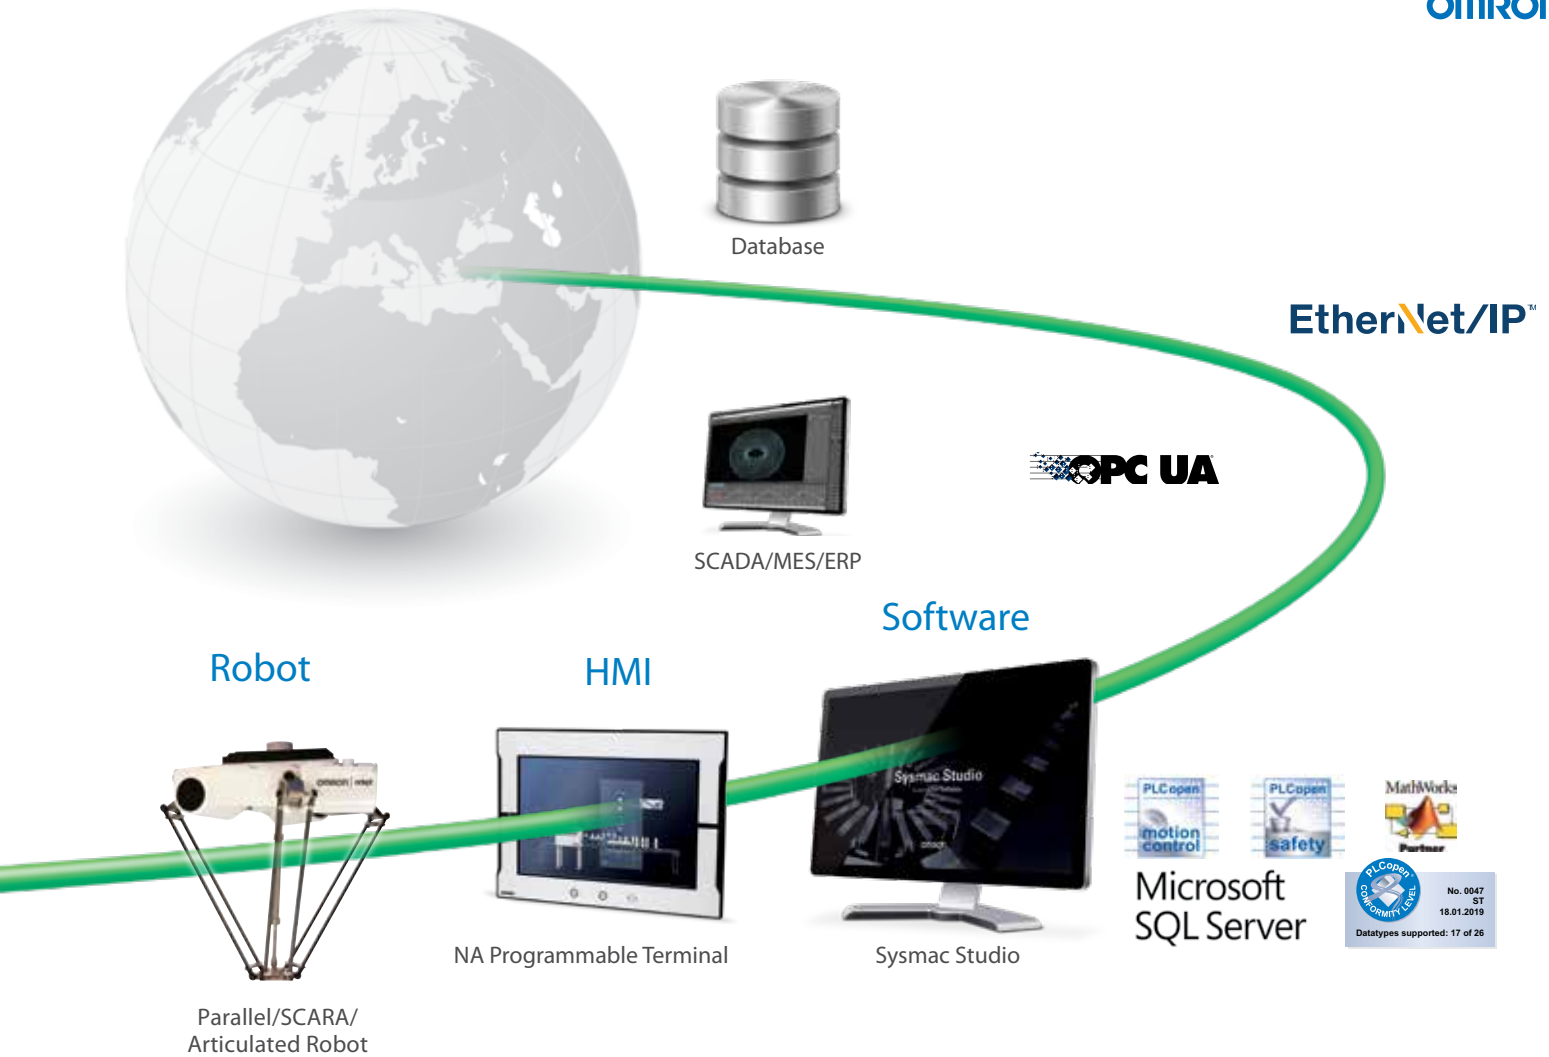

Ethernet - Factory Automation

- Peer-to-Peer controller communication
- Interface with Sysmac Studio , NA HMI or SCADA software
- Database connection for Microsoft SQL Server, Oracle, IBM DB2, MySQL and Firebird
- FTP server

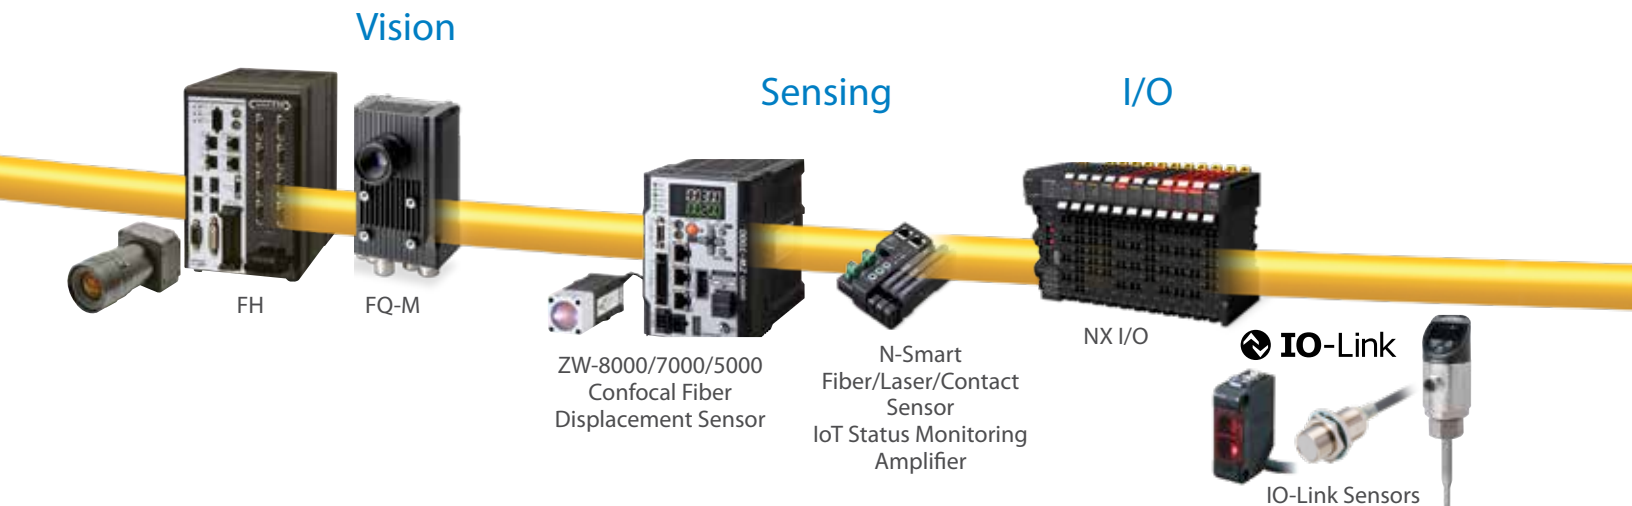

One Software

One Integrated Development Environment Software

Created to give you complete control over your automation system, Sysmac Studio integrates configuration, programming and monitoring. Graphics-oriented configuration allows quick set-up of the controller, field devices and networks while machine and motion programming based on IEC standard and PLCopen Function Blocks for Motion Control cuts programming time. Smart Editor with On-line debugging helps quick and error free programming. Advanced simulation of sequence and motion control, and data trace reduce machine tuning and set-up.



Design

Reusable programs

| Programming with variables



One Integrated Development Environment software Sysmac Studio is fully compliant with the open standard IEC 61131-3. Programming with variables eliminates the need to learn the internal memory map of the PLC and allows the programs to be reused.

Maintenance

Highly efficient maintenance

| Troubleshooting



Troubleshooting in the Sysmac Studio and NA Programmable Terminal can manage errors across the entire system including the controller. You can check details of errors and solutions without reading manuals.

* This function can be used by applying the Team Development Option to Sysmac Studio version 1.20 or higher. Project version control function is supported by CPU Unit version 1.16 or later.




Sysmac Library provides a collection of software functional components

Packed with Omron's rich technical know-how, the Function Blocks in the Sysmac Library for advanced applications and motion control cut programming time.

Development by multiple developers

Project version control function*

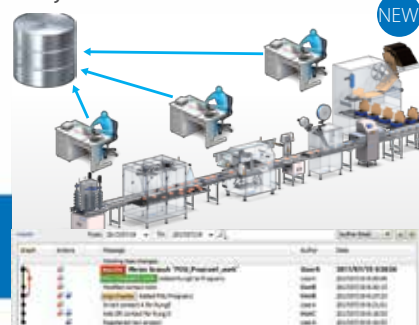

When you develop a project at the same time as your colleagues, the Sysmac Studio combined with the version control system (Git™) merges changes automatically and resolves conflicting changes. This makes merging easier and faster. You can even revert to the previous revision after graphically comparing the current project with a previous one.


For advanced machine control

Motion programming



Advanced motion control applications can be created quickly by simply combining PLCopen® Function Blocks for Motion Control.

Model-Based design

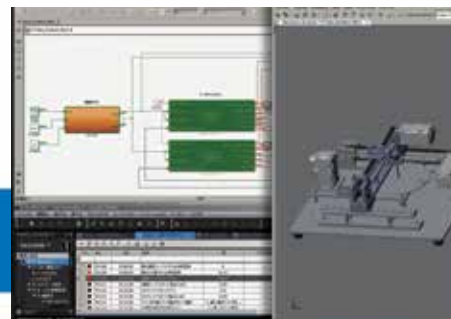

Complex feedback control that is designed with MATLAB®/Simulink® can be imported into programs.



Verification


Fast system debugging

Remote maintenance



Movement of the machine connected online can be displayed on the CAD in real time, and movement can also be reproduced from the trace data. Maintenance and troubleshooting can be performed in remote locations.


Virtual mechanical debugging



Before the mechanical prototype is completed, motion can be checked and the program can be debugged. This cuts design time.



3D simulation

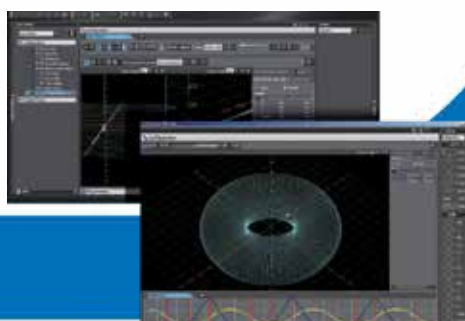

Motion trajectories in 3D can be pre-tested with advanced simulation of sequence and motion control. Simulation of single Function Blocks, POU's (Program Organization Unit) or the entire program can be performed. In addition all standard features such as Break & Step are available. Easy tuning and debugging reduce the set-up times of machines and production lines.

One Machine Controller


NJ/NX/NY Machine Automation Controller

Powerful, yet easy to configure

The NJ/NX/NY Controller is at the heart of the Sysmac platform. One integrated controller is designed to meet extreme requirements in terms of logic sequence and motion control speed and accuracy. Standard programming and open networks make it easy to build your automation system.

High-speed, high-precision control*1

Architecture based on Intel® Core™ i7 processor significantly speeds up the execution of instructions (basic instructions 0.37 ns, math instructions for Long Real Data 3.2 ns). Command values to send to servomotors and stepper motors can be updated as fast as every 125 μs. This enables smooth cam motion and high-precision interpolation and phase adjustment between axes.

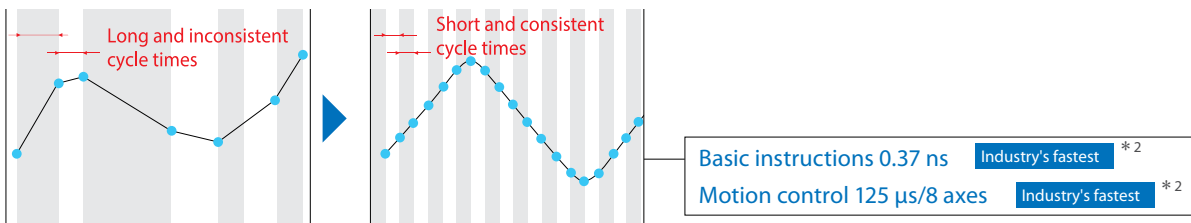


Complete integration of motion and logic

One controller integrates logic, motion, vision and information for complete control and management of machines. Position, displacement, and tension information collected from sensors can be quickly and easily fed back to the motion control.



Integrated safety into machine control*3

The controller integrates safety control into machine control in lines that require fast cycle times. It also integrates two different open networks: EtherNet/IP for safety control in production lines and EtherCAT for safety control in machines.

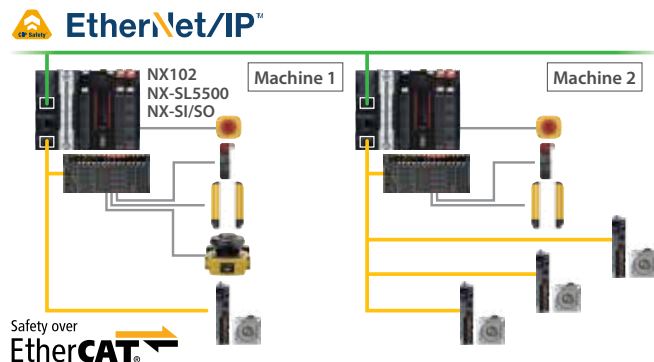

- * 1. Performance of NX701-1□□00
- * 2. Based on Omron investigation in February 2015.
- * 3. Performance of NX102-□□□□ and NX-SL5□□00
- * 4. Database connection CPU unit:
NX102-□□20/NJ□□01-□□20 and NX701-XX20
- * 5. Performance of NX102-□□□□/NJ501-1□□00

Fast machine data storage in database*4

The controller connects directly to a database without the need for a gateway. The special instructions allow easy access to the database.

Real-time data collection enables productivity improvement, predictive maintenance, and quality traceability.



Supported databases

- Microsoft SQL server
- Oracle Database
- IBM DB2
- MySQL
- PostgreSQL
- Firebird



Secure host connection*5

OPC UA is an IEC communication protocol which is listed as a recommendation for Industrie 4.0 and PackML. The NX1 comes equipped with an OPC UA server interface and provides a secure connection to IT systems such as MES and ERP.



Standard programming

- Fully conforms with IEC 61131-3 standards
- PLCopen Function Blocks for Motion Control



Global standard networks

EtherCAT®

Standard Machine Network

EtherNet/IP™

Standard Factory Network

Collection of software functional components Sysmac Library

- FB library option for advanced applications (vibration suppression, temperature control, motion control...)
- High quality products with reliable global support



Sysmac Family

Controllers

NX1 Machine Automation Controller


Compact size controller integrates production line and IT systems

Improve productivity, improve your business

The NX1 can utilize information, take safety measures, and control quality while at the same time improving production efficiency through high-speed, high-precision control.


Extensive functionality in a compact size

Three industrial Ethernet ports and a power supply are housed in a compact design with a width of 66 mm. The multicore microprocessor and OPC UA connectivity enable information utilization without compromising control performance.

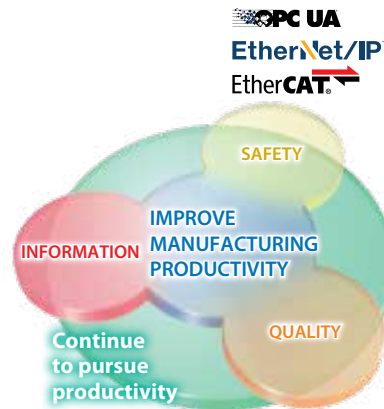

NY5□□-1/NY5□□-5 IPC Machine Controller

An IPC machine controller combines machine control and IT technology

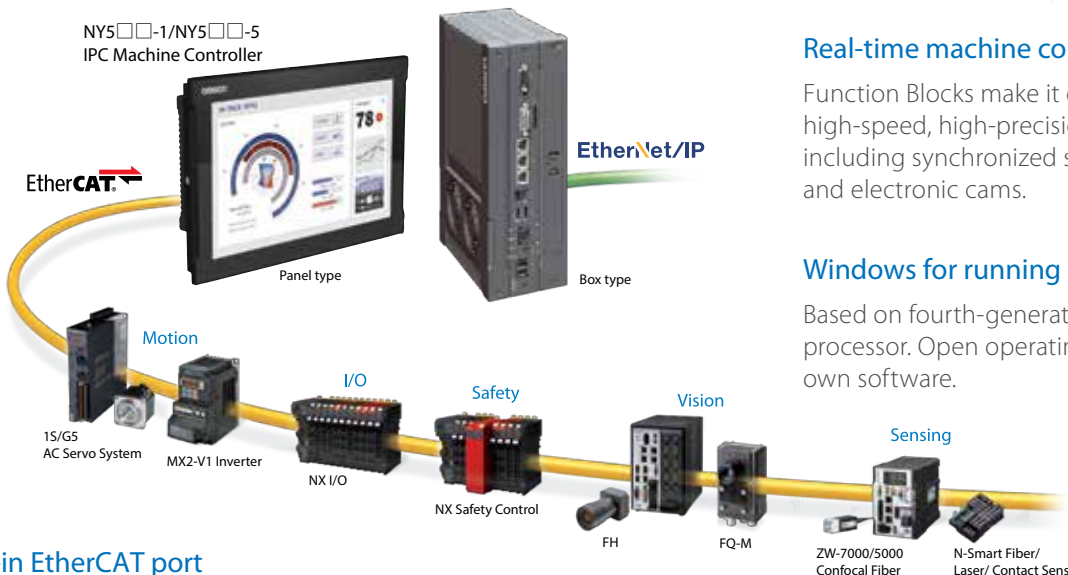

Real-time machine control

Function Blocks make it easier to program high-speed, high-precision motion control including synchronized servomotor control and electronic cams.

Windows for running applications




Based on fourth-generation Intel® Core™ i7-4700EQ processor. Open operating system enables use of own software.

Built-in EtherCAT port

EtherCAT connectivity simplifies installation of automation devices and safety devices: up to 192 synchronized slaves, up to 64 axes of motion control, and Safety over EtherCAT. Fully conforms to IEC 61131-3 standard programming.

Lineup

Series	NX Series			NJ Series			
Model	NX1P2-□□□□	NX102-□□□□	NX701-□□□□	NJ101-□□□□	NJ101-□□□□ □□20	NJ301-□□□□	NJ501-□□□□
Feature	Motion control and built-in I/O	Compact controller with up to 8 axes motion control	For large-scale control with up to 256 axes	For simple machines		For small-scale control with up to 8 axes	For large-scale control with up to 64 axes
Appearance							
Instruction execution times (LD instruction)	3.3 ns	3.3 ns	0.37 ns	3.0 ns		1.6 ns	1.1 ns
Program capacity	1.5 MB	5 MB	80 MB	3 MB		5 MB	20 MB
Variables capacity (No retain attribute)	2 MB	32 MB	256 MB	2 MB		2 MB	4 MB
I/O capacity	40 points	—	—	2,560 points		2,560 points	2,560 points
Number of EtherCAT slaves	16	64	512	64		192	192
Number of motion axes	0, 2, 4	0, 2, 4, 8	128, 256	0, 2		4, 8	16, 32, 64
Functions	—	Database connection (NX102-□□20)	Database connection (NX701-1□20)	—	Database connection	—	—

Series	NJ Series				NY Series		
Model	NJ501-4□□□	NJ501-1□20	NJ501-1340	NJ501-5300	NY51□-1	NY53□-1	NY53□-5□00
Feature	For large-scale control with up to 64 axes				Perfect integration: Sysmac machine control and ICT		
Appearance							
Instruction execution times (LD instruction)	1.1 ns				0.33 ns		
Program capacity	20 MB				40 MB		
Variables capacity (No retain attribute)	4 MB				64 MB		
I/O capacity	2,560 points				—		
Number of EtherCAT slaves	192				192		
Number of motion axes	16, 32, 64		16		16, 32, 64		32
Functions	Robot control	Database connection	SECS/GEM communication	Numerical control (NC)	—	—	Numerical control (NC)

Sysmac Family

Software

SYSMAC-SE2□□□

Sysmac Studio Automation Software

One software for programming, configuration, simulation and monitoring

- One software for motion, logic sequence, safety, vision and visualization
- Fully compliant with open standard IEC 61131-3
- Supports Ladder, Structured Text, and Function Block programming with a rich instruction set
- Advanced security function with 32 digit security password



SYSMAC-XR□□□



Sysmac Library

Omron's control expertise changes programming

- Advanced control such as vibration suppression and temperature control
- High-precision control of packaging machines and actuators for servo presses
- Productivity improvement by monitoring device operations and restoring parameters
- Reduction in programming time



Lineup

Series	Automation Software Sysmac Studio	Collection of software functional components Sysmac Library
Model	SYSMAC-SE2□□	SYSMAC-XR□□□
Appearance		
System requirements	<p>[Operating system (OS)] Windows 7 (32-bit/64-bit version), Windows 8 (32-bit/64-bit version), Windows 8.1 (32-bit/64-bit version), Windows 10 (32-bit/64-bit version)</p> <p>[CPU] Windows computers with Intel® Celeron™ processor 540 (1.8 GHz) or faster CPU. Intel® Core™ i5 M520 processor (2.4 GHz) or equivalent or faster recommended.</p>	<p>[Applicable models] For details, refer to the catalog of Sysmac Library.</p>
Included software/ Libraries	<p>CX-Designer CX-Integrator CX-Protocol Network Configurator SECS/GEM Configurator Adept Robot IP Address Setting Tool CX-ConfiguratorFDT IODD DTM Configurator</p>	<p>MC Test Run Library MC Command Table Library MC Tool Box Library EtherCAT G5 Series Library EtherCAT N-Smart Series Library Vibration Suppression Library Temperature Control Library Device Operation Monitor Library Adept Robot Control Library Weighing Control Library EtherCAT 1S Series Library Packaging Machine Library Servo Press Library Dimension Measurement Library Safety System Monitor Library High-Speed Analog Inspection Library SLMP Communications Library Visual Feedback Alignment Library</p>

Sysmac Family

HMI

NA Programmable Terminal

Make industrial machines more attractive and competitive by bringing technology to life

As part of the Sysmac automation platform, NA transforms machine data into information, shows information and controls devices based on requirements at manufacturing sites.





- One connection: Connectable with Sysmac products
- One software: The machine interface brings you a clear view in one integrated project.
- Rich media provide an intuitive and proactive machine management tool
- More than 16 million display colors (24-bit full color)



IAG – Intelligent Application Gadgets

The graphics collection accelerates the development process. You can make your own collections and share them between projects.

Lineup

Series	NA Series			
Feature	More than 16 million color (24 bit full color) and wide screen for all models			
Appearance				
Display device	TFT LCD			
Screen size	15.4-inch widescreen	12.1-inch widescreen	9.0-inch widescreen	7.0-inch widescreen
Number of dots (horizontal × vertical)	WXGA 1,280×800 dots		WVGA 800×480 dots	
Colors	16,770,000 colors (24 bit full colors)			
Built-in ports	2 Ethernet ports, 2 USB host ports, 1 USB slave port			
Allowable power supply voltage range	19.2 to 28.8 VDC			
Degree of protection	Front-panel controls: IP65 oil-proof type			
Memory card	SD/SDHC memory card			
Flame colors	Black, silver			

Sysmac Family

Motion

R88M-1□/R88D-1SN□-ECT 1S AC Servo System

Improved machine design. Increased machine productivity

Optimized installation and commissioning tasks

- Reduce cabinet size with compact servo drive with same height throughout the whole power range
- Fast and secure screw-less push-in in control I/O connector and brake interlock connector

23 bit high resolution encoder

- No battery, no maintenance and compact size

Multi-axis setup and tuning

- Configure and monitor multiple axes in one view
- Easy & fast parameter transfer among axes in the machine (up to 256 axes)
- Comprehensive gain tuning

Safety control via EtherCAT

- EN ISO 13849-1(Cat.3 PLd)
- EN61508(SIL2), EN62061(SIL2)
- EN61800-5-2(STO)

EtherCAT[®]



Safety over
EtherCAT[®]

R88M-K/R88D-KN□-ECT□R88L-EC/R88D-KN□-ECT-L G5 AC Servomotor/Linear Motor/Servo Drive

At the heart of every great machine

Rotary motors

- Motors with IP67
- Large range of motors from 0.16 Nm up to 96 Nm nominal torque (224 Nm peak)

Ironless linear motors

- Excellent force-to-weight ratio
- No latching force

Iron-core linear motors

- Optimum ratio between force and volume
- Weight-optimized magnetic track

Safety conformance

- ISO13849-1(PLC,d)
- EN61508(SIL2)
- IEC61800-5-2(STO)

EtherCAT[®]



Lineup

Series	1S Series		G5 Series	
Model	R88M-1□/R88D-1SN□-ECT		R88M-K/R88D-KN□-ECT•R88L-EC/ R88D-KN□-ECT-L	
Appearance				
Type	Built-in EtherCAT Communications		Built-in EtherCAT Communications	
Linear Type	No		Yes. Refer to the G5 Series Catalogs (Cat. No. I815 and I816) for details.	
100 VAC Applicable motor capacity/force	50 W to 400 W		50 W to 400 W	
200 VAC Applicable motor capacity/force	50 W to 3 kW		50 W to 15 kW	
400 VAC Applicable motor capacity/force	600 W to 3 kW		400 W to 15 kW	
Applicable servomotor	1S Servomotor		G5 Rotary Servomotor	
Control mode	Position, speed and torque control		Position, speed and torque control	
Safety approvals	<ul style="list-style-type: none"> · ISO 13849-1 (PL-e/PL-d) · EN61508 (SIL3/SIL2) · EN62061 (SIL3/SIL2) · IEC 61800-5-2 (STO) 		<ul style="list-style-type: none"> · ISO 13849-1 (PL-c/PL-d) · EN61508 (SIL2) · EN62061 (SIL2) · IEC 61800-5-2 (STO) 	
Full closed loop	—		Built-in	
Appearance				
Rated rotation speed	3,000 r/min	2,000 r/min	3,000 r/min	2,000 r/min
Momentary maximum rotation speed	5,000 to 6,000 r/min	3,000 r/min	4,500 to 6,000 r/min	3,000 r/min
Rated torque	0.318 to 9.55 N·m	4.77 to 14.3 N·m	0.16 to 15.9 N·m	1.91 to 23.9 N·m
Capacity	50 W to 3 kW	400 W to 3 kW	50 W to 5 kW	400 W to 5 kW
Applicable servo drive	1S Servo Drive		G5 Servo Drive (for rotary servomotor)	
Encoder resolution	23-bit absolute	23-bit absolute	20-bit incremental/ 17-bit absolute	20-bit incremental/ 17-bit absolute
Protective structure			IP67	
Appearance				
Rated rotation speed	1,000 r/min		1,500 r/min	1,000 r/min
Momentary maximum rotation speed	2,000 r/min		2,000 to 3,000 r/min	2,000 r/min
Rated torque	8.59 to 28.7 N·m		47.8 to 95.5 N·m	8.59 to 57.3 N·m
Capacity	900 W to 3 kW		7.5 to 15 kW	900 W to 6 kW
Applicable servo drive	1S Servo Drive		G5 Servo Drive (for rotary servomotor)	
Encoder resolution	23-bit absolute		17-bit absolute	20-bit incremental/ 17-bit absolute
Protective structure			IP67	

Sysmac Family

Motion

3G3MX2-A□□□□-V1 MX2-V1 Multi-function Compact Inverter


Born to drive machines

Torque control in open loop

- Ideal for low to medium torque applications
- Can replace a flux vector inverter or servo drive in suitable systems

Quick response to load fluctuation

- Stable control without decreasing machine speed improves quality and productivity

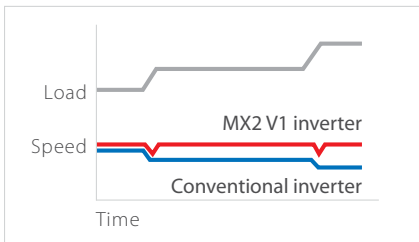

Safety inside

- Conforms to safety standard ISO 1384901 Cat. 3 performance level PLd
- 2 Safety inputs
- External device monitoring (EDM)

Other Features

- Maximum applicable motor capacity: 15 kW
- Double rating (CT: Heavy load/VT: Light load)
- Permanent magnet motors
- Drive Programming
- Built-in brake control function

EtherCAT



3G3RX-□□□□□-V1 RX-V1 High-function General-purpose Inverter



Versatile for a wide range of applications

- Maximum applicable motor capacity: 132 kW
- Dual rating (CT: Heavy load/VT: Light load)
- Sensorless vector control, Vector control with a PG
- Drive Programming
- Built-in Electronic gear

EtherCAT



Lineup

Series		MX2 Series V1 type	RX Series V1 type
Model		3G3MX2-V1	3G3RX-V1
Appearance			
Power supply and capacity	Three-phase 200 V	0.1 to 15 kW(CT)	0.4 to 55 kW(CT)
	Three-phase 400 V	0.4 to 15 kW(CT)	0.4 to 132 kW(CT)
	Single-phase/three-phase 200 V	No	—
	Single-phase 200 V	0.1 to 2.2 kW(CT)	—
Control methods		<ul style="list-style-type: none"> · V/F control · Sensorless vector control 	<ul style="list-style-type: none"> · V/F control · Sensorless vector control · Vector control with a PG
Input/output	No. of multi-function I/O points	<ul style="list-style-type: none"> · 7 inputs · 2 transistor outputs · 1 relay output 	<ul style="list-style-type: none"> · 9 inputs (1 RUN (FWD) input + 8 multi-function inputs) · 5 transistor outputs · 1 relay output
	Analog I/O	<ul style="list-style-type: none"> · 2 inputs (0 to 10 V, 4 to 20 mA) · 1 output (0 to 10 V) 	<ul style="list-style-type: none"> · 2 inputs (1) 0 to 10 V, 4 to 20 mA (2) 0 to ±10 V · 2 outputs (1) 0 to 10 V (2) 4 to 20 mA · 1 PWM voltage output
Braking		<ul style="list-style-type: none"> · Braking resistor connection · Regenerative Braking Unit connection · Regenerative Braking Unit + braking resistor connection 	<ul style="list-style-type: none"> · Braking resistor connection (22 kW max.) · Regenerative Braking Unit connection · Regenerative Braking Unit + braking resistor connection
Frequency	Frequency setting range	0.1 to 400 Hz	0.1 to 400 Hz
	Frequency output method	Line-to-line sine wave PWM	Line-to-line sine wave PWM
Installation and wiring	Side-by-side mounting	Yes	No
	Removable terminal block	No	Yes
	Power supply and motor wiring	Bottom wiring	Bottom wiring
Main functions	Multistep speed control	16 steps + jog	16 steps + jog
	Carrier frequency setting	2 to 15 kHz (default setting: 5 kHz)	2 to 15 kHz (default setting: 5 kHz)
	Torque assist function	Auto/manual torque assist	Auto/manual torque assist
	PID function	Yes	Yes
	Absolute value positioning	No	Yes
	Emergency shutoff	Yes	Yes
	0-Hz domain sensorless vector control	No	Yes
	Tripless function	Yes	Yes
	Momentary power interruption restart	Yes	Yes
	Double Rating	Yes	Yes
	Permanent magnet motor control	Yes	—
Starting torque	200% at 0.5 Hz	<ul style="list-style-type: none"> · 200% at 0.3 Hz in open loop · Full torque at 0 Hz in closed loop 	
PLC functionality (Drive Programming)	Provided	Provided	
Communications		Optional EtherCAT communication unit	Optional EtherCAT communication unit
Safety approvals		<ul style="list-style-type: none"> · ISO 13849-1 (Cat.3/PLd) · IEC 60204-1 Stop Category 0 	—

Sysmac Family

I/O

NX I/O System

Speed and accuracy for machine performance

Based on an internal high-speed bus running in synchronization with the EtherCAT network and using the time-stamp function, the NX I/O can be controlled with microsecond accuracy and with nanosecond resolution.

The I/O range consists of over 100 models including position control, temperature inputs and integrated safety.



Communications coupler

- EtherCAT®
- EtherNet/IP™



IO-Link master

- Up to 4 IO-Link devices with one master

Serial communications

- RS-232C or RS-422A/485 interface



RFID

- Direct connection to V680 RFID System



Digital I/O

- 4, 8, 16, or 32 channels per input unit
- 2, 4, 8, 16, or 32 channels per output unit (8 channels per relay output unit)
- 16 channels per mixed I/O unit
- Standard, high-speed, and time-stamp models
- Units with Push-In Plus/MIL/Fujitsu/M3 Screw connector



Analog I/O

- +/-10V voltage and 4-20 mA current signals
- 2, 4 or 8 channels per input unit
- 2 or 4 channels per output unit
- Standard and high-performance models
- Single-ended input and differential input models

High-speed analog input

- 4 channels per input unit
- Differential input
- Sampling as fast as every 5 μs



Load cell inputs

- One load cell with one unit
- Fastest conversion cycle of 125 μs



Safety I/O

- 4 or 8 safety input points per unit
- 2 or 4 safety output points per unit
- Free allocation of the safety I/O units on the internal high speed bus

Safety CPU

- EN ISO13849-1 (PLe/Safety Category 4), IEC 61508 (SIL3) certified



Temperature inputs

- Thermocouple or RTD inputs, 2 or 4 per unit
- Conversion time of 10 ms, 60 ms or 250 ms

Heater burnout detection

- 4 CT sensor inputs and 4 trigger outputs to drive SSRs



Temperature control


- 2 or 4 multi-input (thermocouple and resistance thermometer) channels per unit
- Conversion time of 50 ms
- Voltage output (for driving SSR) or linear current output
- 1 CT input per channel




Position interface

- Incremental and absolute encoder support
- Pulse output unit (line driver output model)

Lineup

Series	NX Series
Features	<ul style="list-style-type: none"> · Over 100 models including digital I/O, analog I/O, position interface, temperature inputs, temperature control, RFID, safety CPU, and safety I/O · NsynX technology provides I/O response with less than 1 μs jitter · Screwless terminal block, connector, and M3 screw types · Up to 32 channels per digital input unit or output unit
Appearance	
Type	Modular I/O
Communications interface	EtherCAT
Number of connectable units	<ul style="list-style-type: none"> · 63 units max. · Input: 1,024 bytes max., output: 1,024 bytes max.
Unit types	Communications coupler, IO-Link master, serial communication, RFID, digital I/O, analog I/O, high-speed analog input, load cell input, safety I/O, safety CPU, temperature input, heater burnout detection, temperature control, position interface
Mounting	DIN track

* See page 27 for more information on safety I/O.

Series	GX Series
Features	<ul style="list-style-type: none"> · Detachable screw terminal block and e-CON connector types · Easy set-up: automatic and manual address setting
Appearance	
Type	Block I/O
Communications interface	EtherCAT
Number of connectable units	One expansion unit can be connected with one digital I/O terminal (16 inputs + 16 outputs)
I/O types	Digital I/O, analog I/O, encoder input, IO-Link master, expansion unit
Mounting	DIN track


Sysmac Family

Safety

NX-SL/SI/SO NX Safety Controller

Integrated safety into machine automation

- The safety controller meets PLe according to the ISO 13849-1 and SIL3 according to IEC 61508
- Flexible system lets you freely mix safety controller and safety I/O units with standard NX I/O
- Integration in One software, Sysmac Studio
- Certified programs can be reused, which reduces the amount of verification work

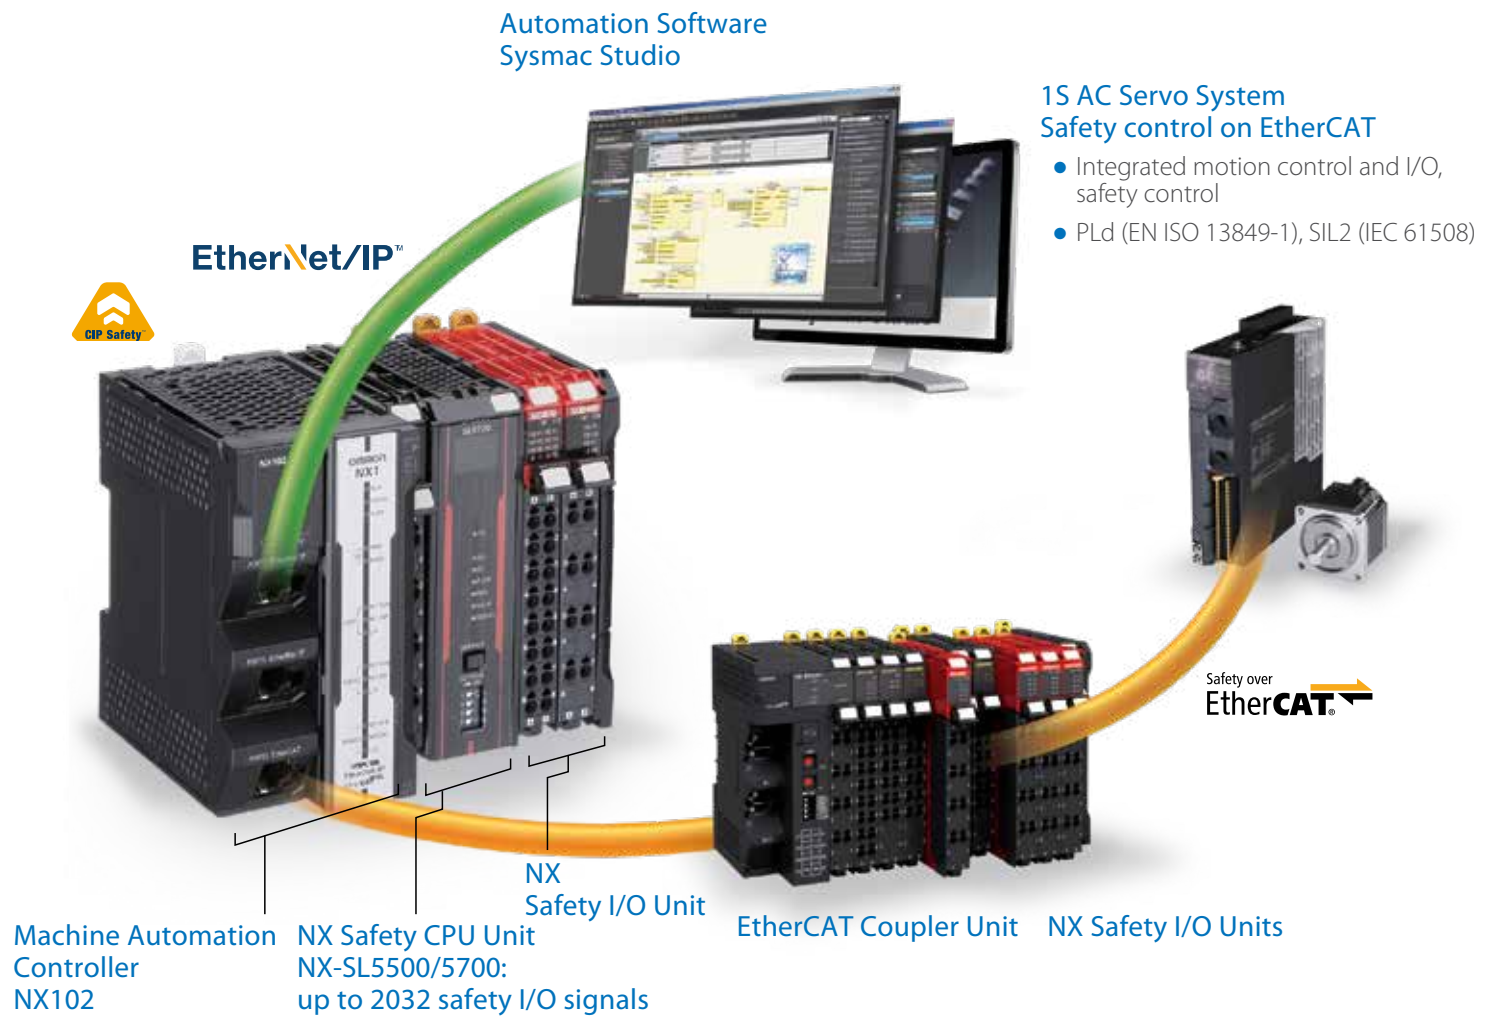

Lineup

Safety Controller

Product name	Safety CPU Unit	
Model	NX-SL5500/5700	NX-SL3300/3500
Features	<ul style="list-style-type: none"> · Two different networks, Safety over EtherCAT (FSoE) and EtherNet/IP (CIP Safety), in a single system · Line safety control and fast machine control at the same time · Sysmac Studio version 1.24 or higher for hardware configuration and programming · Flexible Safety system building · Optimal I/O building 	<ul style="list-style-type: none"> · Integrated safety into machine automation through the use of Safety over EtherCAT -FSoE- protocol. Freely mixing with standard NX I/O · Sysmac Studio version 1.07 or higher for hardware configuration and programming · Flexible Safety system building · Optimal I/O building
Appearance		
Network	Safety over EtherCAT (FSoE), EtherNet/IP (CIP Safety)	Safety over EtherCAT (FSoE)
Applicable standards	EN ISO 13849-1 (PLe/Safety Category 4), IEC 61508(SIL3), IEC/EN 62061(SIL CL3), IEC/EN 61131-2, IEC 6132-3-1, IEC 61131-6	EN ISO 13849-1 (PLe/Safety Category 4), IEC 61508 (SIL3), EN 62061 (SIL CL3), IEC/EN 61131-2, IEC 6132-3-1
Programming	<ul style="list-style-type: none"> · IEC 61131-3 standard · PLCopen Function Blocks for Safety 	
Program capacity	2048 KB, 4096 KB	512 KB, 2048 KB
Safety I/O connection	128/254	32/128
Maximum number of safety I/O points	1024, 2032	256, 1024
Units that can connect	NX102 CPU Unit, Communication Control Unit	NX102 CPU Unit, EtherCAT Coupler Unit, EtherNet/IP Coupler Unit

Product name	Safety Input Unit	Safety Output Unit
Model	NX-SIH400/SID800	NX-SOH200/SOD400
Appearance		
Applicable standards	EN ISO 13849-1 (PLe/Safety Category 4), IEC 61508(SIL3), IEC/EN 62061(SIL CL3), IEC/EN 61131-2, IEC 6132-3-1	
Number of safety input/output points	4, 8	2, 4

Sysmac Family

Vision

FH Vision System

Flexible solution for machine vision

The FH Vision System is optimized to detect the position and orientation of any object at high speed and with high accuracy. The built-in EtherCAT communications enable reliable and easy networking with motion control, increasing the overall machine performance. A flexible machine vision tailored for quality inspection.




Wide camera range

- Up to 20.4 M pixel
- High speed CMOS camera
- Use different fields of vision and at any angle



Advanced shape search technology

- Differences of the work piece
- Dust and dirt conditions
- Detection of overlapping objects
- Changing ambient environment



Unique light

- The MDMC light flexibly changes illumination colors and angles according to items to measure.



Multiple inspection

- Powerful 4-core i7 parallel processor
- Up to 8 camera by one controller



FQ-M Vision Sensor

Designed for object tracking

The FQ-M Series is a vision sensor designed specifically for pick and place applications. Up to 5,000 pieces per minute with 360 degree rotation can be detected. The FQ-M series include an incremental encoder input for easy tracking and calibration.



EtherCAT

Compact design

Camera and image processing in one


Standard C-mount lenses; choose the field of view and focus distance you need

- Flexible cables
- Vision sensor with encoder
- input for tracking function


Varying material ie. shiny



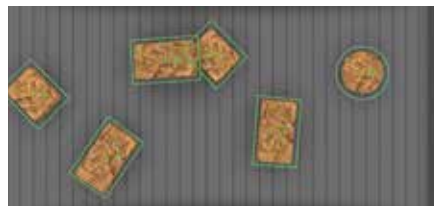

Advanced shape search technology
Overlapping products

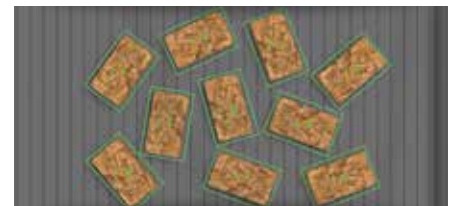

Product detection:
10 pcs with rotation < 200 ms



Lineup

Product name		Smart Camera	Vision System
Series		FQ-M Series	FH Series
Appearance			
Hardware features		· Camera and image processing in one · Easy to installation	Flexible configuration of cameras and controller to suit your applications
Software feature		Communication wizard for easy setting	Flexible setting with flowchart
Processing items		Processing items for Pick & Place applications	Processing items covering general applications
Processing resolution	0.4 Mpix	752 (H)×480 (V)	720 (H)×540 (V)
	5 Mpix	—	2448 (H)×2048 (V)
	20.4 Mpix	—	5544 (H)×3692 (V)
Communications interfaces		EtherCAT, Ethernet, Parallel I/O, encoder input	

Sysmac Family

Sensing

ZW-8000/7000 Confocal Fiber Displacement Sensor

Measure anything from anywhere for the most reliable in-line measurements

The ZW-8000 Series provides high-precision in-line measurements of rattling or inclined shiny, thin, or minute parts. The ZW-7000 Series provides ultra-high-speed, stable measurements of diffuse reflective objects during movement. These sensors help increase quality inspection accuracy and reduce inspection time.



Reliable measurements for any material and surface types

The white light confocal principle allows a continuous measurement of object in any mixed conditions such as mirror, coarse, transparent, curved, or narrow areas without stopping the sensor head.




- Angle characteristic: $\pm 25^\circ$ for shiny surfaces
- Linearity for different materials: $\pm 0.3 \mu\text{m}$
- Minimum sampling period: 20 μs
- Minimum spot diameter: 4 μm

Note: Specifications differ among models. Please ask Omron sales representative for details.

E3NX/E3NC/E9NC Series N-Smart Series

Various sensors connected over EtherCAT

The N-Smart lineup of next-generation fiber sensors, laser sensors and contact sensors will quickly solve your problems and therefore maximize uptime and minimize downtime with optimum cost performance.

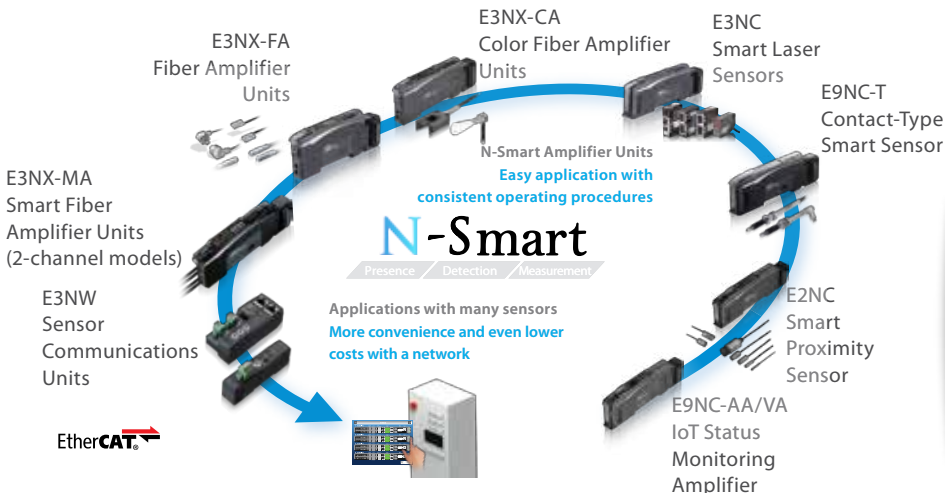




Features

- Ultra-easy Advanced Smart Tuning with the push of a button
- More stable detection of high-speed workpieces
- Predictive maintenance to reduce downtime
- Highly visible white LED display
- E3NX-FA has 1.5x the sensing distance of conventional amplifiers*

* Compared with E3X-HD

Lineup

Product name	Confocal Fiber Displacement Sensor		
Series	ZW-8000 Series	ZW-7000 Series	ZW-5000 Series
Feature	For measurements of rattling or inclined "transparent objects or mirror surfaces" such as thin film sheets or glass	For accurate shape measurements of "coarse surfaces" while the sensor head is moving	Bring the benefits of the white light confocal principle to production lines
Appearance			
Measurement method	White light confocal principle		
Measuring range	Min : 7±0.3 mm, Max : 30±2 mm		
Static resolution	0.002 to 0.016 μm		
Linearity	±0.3 to ±3.0 μm		
Spot diameter	4 to 11 μm	50 to 190 μm	9 to 20 μm
Measurement cycle	60 to 7500 μs	20 to 400 μs	80 to 1600 μs

Product name	Fiber Sensor/Laser Sensor/Proximity Sensor/Contact Sensor	
Series	N-Smart Series	E3X/E3C/E2C
Feature	Connect fiber, laser and contact sensors to EtherCAT at low initial cost	Easily connect fiber, laser photoelectric and proximity sensors to EtherCAT
Appearance		
Network specification	EtherCAT communication unit	EtherCAT communication unit
Sensor Communications Units	E3NW-ECT/DS	E3X-ECT
Connectable sensor amplifier units	Fiber Sensor E3NX-FA0 E3NX-CA0 Laser Sensor E3NC-LA0 E3NC-SA0 Contact Sensor E9NC-TA0 IoT Status Monitoring Amplifier E9NC-AA0/VA0	Fiber Sensor E3X-HD0 E3X-MDA0 Laser Sensor E3C-LDA0 Proximity Sensor E2C-EDA0
Maximum number of connectable sensors	30	30

Sysmac Family

Robot

Hornet/Quattro, Cobra/eCobra, Viper Parallel Robot, SCARA Robot, Articulated Robot

Advanced solutions for flexible production lines

Our parallel, SCARA and articulated robots are designed to be programmed using familiar languages (IEC 61131-3) with NJ/NX/NY controllers connected via EtherNet/IP.

Parallel robots

The Hornet and Quattro are parallel robots ideal for use in the food and beverage, pharmaceutical, and healthcare industries. The Quattro is a four-axis parallel robot with a high payload capacity that achieves high speed and high precision.

- Fast and high-precision conveyance and assembly
- Supports fast Pick & Place on a fast conveyor
- Maximum working range: 1130, 1300, and 1600 mm models



Hornet 565
Quattro 650/800

SCARA robots

High-performance four-axis SCARA robots are ideal for mechanical assembly, material handling, packaging, machine tending, and screw driving. Table/floor or Inverted mounting models are available.

- High repeatability suitable for material handling and precision assembly
- Reach: 450, 500, 600, 650, and 800 mm models



Cobra 450/500/650
eCobra 600/800
eCobra 800 Inverted

Articulated robots




Six-axis articulated robots are ideal for mechanical assembly, material handling, packaging, and palletizing.




- Diagnostics display enables faster trouble shooting
- High accuracy, superior slow-speed following, and easy calibration
- Reach: 653 and 855 mm models



Viper 650/850

Lineup

Series		Hornet 565	Quattro 650/800	Cobra 450/500/650
Feature		Parallel robot ideal for use in the food and beverage, pharmaceutical, and healthcare industries	Four-axis parallel robot achieves high speed and high precision	Mid-size SCARA robot for material handling, assembly, precision machining and adhesive application
Appearance				
Robot type		Parallel robot	Parallel robot	SCARA robot
Number of axes		3, 4	4	4
Mounting		Inverted	Inverted	Table/Floor
Payload capacity		3 kg (8 kg: without rotation axis)	· Quattro 650 6 kg (No rotation: 15 kg) · Quattro 800 4 kg (No rotation: 10 kg)	5 kg
Working volume (radius)		565 mm	650 to 800 mm	—
Reach		—	—	450 to 650 mm
Position repeatability		±0.10 mm	±0.10 mm	±0.02 mm
Protection/ Cleanroom classes	Specifications	IP67: arms and platform IP65: underside of robot IP20: topside of robot	· H type IP67: arms and platform IP65: underside of robot IP20: topside of robot · HS type IP67: arms and platform IP66: robot base	IP20
	Option	IP65: topside of robot (with optional cover)	H type IP65: topside of robot (with optional cover)	—

Series		eCobra 600/800	eCobra 800 Inverted	Viper 650/850
Feature		Mid-size/large SCARA robot for precision machining, assembly, and material handling	Overhead-mount large SCARA robot for precision machining, assembly, and material handling	Articulated robot for machining, assembly, and material handling
Appearance				
Robot type		SCARA robot	SCARA robot	Articulated robot
Number of axes		4	4	6
Mounting		Table/Floor	Inverted	Table/Floor/Inverted
Payload capacity		5.5 kg	5.5 kg	5 kg
Working volume (radius)		—	—	—
Reach		600 to 800 mm	800 mm	635 to 855 mm
Position repeatability		±0.017 mm	±0.017 mm	±0.02 to 0.03 mm
Protection/ Cleanroom classes	Specifications	IP20	IP20	IP40
	Option	· eCobra 600 Class10 Cleanroom model · eCobra 800 IP65, Class10 Cleanroom model	IP65, Class10 Cleanroom model	IP54: robot main body IP65: robot joints (J4, J5, J6) Class10 Cleanroom model

Jump-start your move into factory automation and IIoT with Sysmac starter kits

It's never been easier to take advantage of the powerful Sysmac platform for your machine control or data collection projects. Our Sysmac Starter Kits give you everything you need to design a complete project in which the core automation components work together seamlessly, minimizing integration time and setting a solid control foundation for future expansion and increased performance.

We have a wide selection of kits to give you maximum flexibility with your choice of controller. These kits come with a single-license configuration software (downloadable), and a selection of NJ or NX series controllers paired with the NA5 series HMI. Additional hardware such as network couplers, power supplies and cables are bundled inside the kit depending on the selected controller. Choose your I/O separately from the wide range of NX I/O units available. All this at a great price!

High-Performance Fully Integrated Control

The NJ/NX-Series includes capabilities for seamless integration of Logic, Motion, Vision, Safety, Networks, and Enterprise level control. Selectable models based on application requirements.



Sysmac Studio for Machine Creators

The Sysmac Studio true integrated Development Environment (IDE), part of the Sysmac Studio Software Suite, provides a single operating environment to setup, program, debug and maintain an entire Sysmac NJ/NX-Series machine solution.

One software for configuration, logic, motion, vision, safety, drives, networks, I/Os and enterprise.



Wide Screen High Resolution Displays Impart High Value onto Any Machine

The NA series of advanced wide screen Human Machine interfaces (HMI) offers one of the highest resolution wide-screen displays in the industry. With features that allow designers to add functionality beyond what typical HMI devices had been able to offer, such as custom or machine specific capabilities, the NA series is the ideal machine automation HMI.




NA HMI Part Numbers

- NA5-7W001B - 7 inch
- NA5-9W001B - 9 inch
- NA5-12W101B - 12 inch
- NA5-15W101B - 15 inch

Speed and Accuracy for Machine Performance

The NX I/O system offers a wide variety of I/O devices. It's ultra fast internal bus system is synchronized with the Distributed Clock of the EtherCAT network. The resulting system-wide deterministic I/O operation allows machine builders to improve machine production rates and output quality.

NX-series I/O covers a full range of units, including standard and high-speed digital I/O's, various performance levels in analog I/O, encoder inputs and pulse outputs




Order your kit today from the selection below to get started

NX Controller Starter Kits

Starter Kit Part Number	Description
SSK-□X1900 (□ - 7 9 12 15)	NX102-9000 OPC-UA controller + choice of 7"/9"/12"/15" NA HMI
SSK-□X1100	NX102-1000 OPC-UA controller + choice of 7"/9"/12"/15" NA HMI
SSK-□X1110	NX102-1100 OPC-UA controller + choice of 7"/9"/12"/15" NA HMI
SSK-□X1120	NX102-1200 OPC-UA controller + choice of 7"/9"/12"/15" NA HMI
SSK-□X1902	NX102-9020 OPC-UA/SQL controller + choice of 7"/9"/12"/15" NA HMI
SSK-□X1102	NX102-1020 OPC-UA/SQL controller + choice of 7"/9"/12"/15" NA HMI
SSK-□X1112	NX102-1120 OPC-UA/SQL controller + choice of 7"/9"/12"/15" NA HMI
SSK-□X1122	NX102-1220 OPC-UA/SQL controller + choice of 7"/9"/12"/15" NA HMI

Example : SSK-7X1900 includes NX102-9000 OPC-UA controller & 7" NA5-7W001B HMI



NJ Controller Starter Kits

Starter Kit Part Number	Description
SSK-□190 (□ - 7 9 12 15)	NJ101-9000 controller + choice of 7"/9"/12"/15" NA HMI
SSK-□110	NJ101-1000 controller + choice of 7"/9"/12"/15" NA HMI
SSK-□311	NJ301-1100 controller + choice of 7"/9"/12"/15" NA HMI
SSK-□312	NJ301-1200 controller + choice of 7"/9"/12"/15" NA HMI
SSK-□513	NJ501-1300 controller + choice of 7"/9"/12"/15" NA HMI
SSK-□1902	NJ101-9020 SQL controller + choice of 7"/9"/12"/15" NA HMI
SSK-□1102	NJ101-1020 SQL controller + choice of 7"/9"/12"/15" NA HMI
SSK-□5132	NJ501-1320 SQL controller + choice of 7"/9"/12"/15" NA HMI


Example : SSK-7190 includes NJ101-9000 controller & 7" NA5-7W001B HMI

Add a database connection CPU unit to collect data from existing PLCs of machines, which brings IoT to the system. With two built-in EtherNet/IP™ ports, Modbus/TCP connectivity, and Function Blocks for SLMP communications in Sysmac Library, the NX102 can be easily connected to other vendors' PLCs.

All of the starter kits also include complete product documentation and the following accessories depending on selected kit

Part Number	Description	Quantity	Starter Kit Package
NJ-PA3001	NJ Power Supply	1	NJ Controller Starter Kits
NX-ECC202	EtherCAT I/O Master	1	NJ Controller Starter Kits
SYSMAC-SE201L	Sysmac Studio Standard (downloadable)	Single License	NJ Controller Starter Kits
XS5W-T421-EMD-K	EtherCAT I/O Cable	1	NJ Controller Starter Kits
SYSMAC-LE201L	Sysmac Studio Lite (downloadable)	Single License	NX Controller Starter Kits
S8VK-G06024	Power Supply 60W	1	NJ & NX Controller Starter Kits
XS6W-6LZH8SS100CM-Y	Ethernet Cable 1 Meter	2	NJ & NX Controller Starter Kits

Service and Support

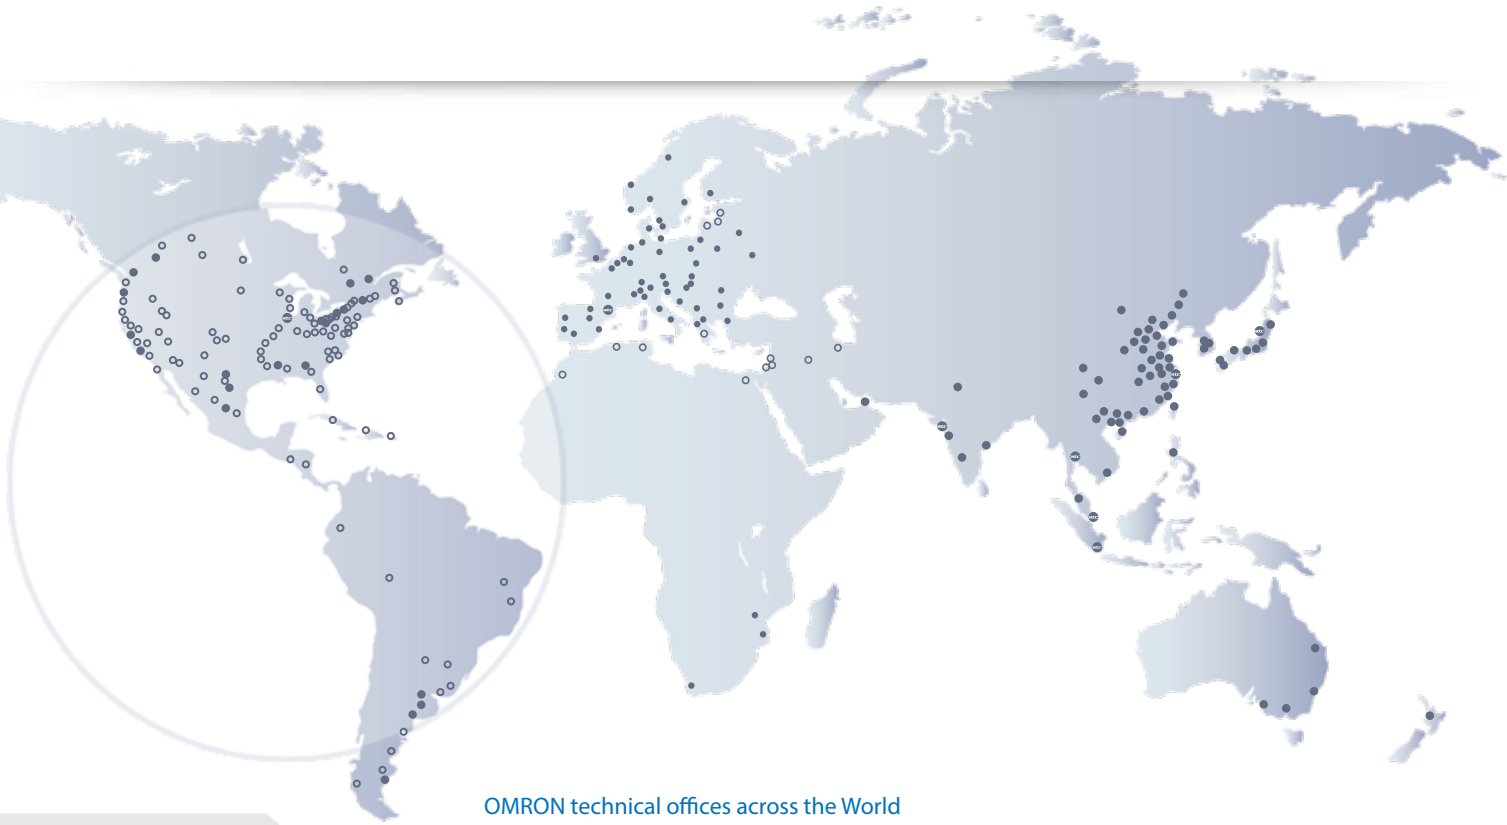

OMRON technical offices across the World

-  Automation Center
Kusatsu (JPN), Kariya (JPN), Shanghai (CHN), Barcelona (ESP), Jakarta (IDN), Mumbai (IND), Hoffman Estates IL (USA), Bangkok(THA), Singapore(SGP), Seoul(KOR)
-  Application Engineering
-  Channel Partner

PRESENCE

COMPETENCE

OMRON



Design

Our wide network of machine automation specialists will help you to select the right automation architecture and products to meet your requirements. Our flat structure based on expert-to-expert contact ensures that you will have ONE accountable and responsible expert to deal with on your complete project.

Proof of concept

As your project matures, you can test your technology and catch up on the latest industry trends in our Automation Centers. You can also interface, test and validate your complete system with our new machine network (EtherCAT) and factory network.

We will assign a dedicated application engineer to assist with initial programming and proof testing of the critical aspects of your automation system. Our application engineers have in-depth expertise in networks, PLCs motion, safety and HMIs when applied to machine automation.



CONFIDENCE

ASSURANCE



Development

During your prototyping phase you will need flexibility in technical support, product supply and exchange. We will assign an inside sales contact to help you source the correct products fast during your prototyping phase.

Commissioning

With our world-wide network for service and support the export of your product is made simple. We will support you on-site with your customer, anywhere in the world. We can arrange a liaison sales engineer to facilitate training, spare parts supply or even machine commissioning. All this in a localised language with localised documentation - giving you complete peace of mind.

Production

As your production increases we will engage in supplying you within 24hrs and repairing within 3 days. All our products are global products meeting global standards - CE, cULus, NK, LR.

OMRON AUTOMATION AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • automation.omron.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • automation.omron.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE

Ciudad de México • 52.55.5901.4300 • 01.800.386.6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

San Pedro Garza García, N.L. • 81.12.53.7392 • 01.800.386.6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

Eugenio Garza Sada, León, Gto • 01.800.386.6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ARGENTINA • SALES OFFICE

Buenos Aires, Argentina • +54.11.4521.8630 • +54.11.4523.8483
mela@omron.com

OTHER OMRON LATIN AMERICA SALES

+54.11.4521.8630 • +54.11.4523.8483 • mela@omron.com

Authorized Distributor:

Controllers & I/O

- Machine Automation Controllers (MAC) • Motion Controllers
- Programmable Logic Controllers (PLC) • Temperature Controllers • Remote I/O

Robotics

- Industrial Robots • Mobile Robots

Operator Interfaces

- Human Machine Interface (HMI)

Motion & Drives

- Machine Automation Controllers (MAC) • Motion Controllers • Servo Systems
- Frequency Inverters

Vision, Measurement & Identification

- Vision Sensors & Systems • Measurement Sensors • Auto Identification Systems

Sensing

- Photoelectric Sensors • Fiber-Optic Sensors • Proximity Sensors
- Rotary Encoders • Ultrasonic Sensors

Safety

- Safety Light Curtains • Safety Laser Scanners • Programmable Safety Systems
- Safety Mats and Edges • Safety Door Switches • Emergency Stop Devices
- Safety Switches & Operator Controls • Safety Monitoring/Force-guided Relays

Control Components

- Power Supplies • Timers • Counters • Programmable Relays
- Digital Panel Meters • Monitoring Products

Switches & Relays

- Limit Switches • Pushbutton Switches • Electromechanical Relays
- Solid State Relays

Software

- Programming & Configuration • Runtime